




Weights and dimensions

SWL : 130 kg, 200 kg
 Unit weight : 4.5 kg
 Carry bar weight (black) : 2 kg
 Carry bar weight (white) : 1.2 kg

A : 210 mm
 B : 180 mm
 C : 160 mm
 D : 515 mm
 Lifting range : 2,100 mm
 Lift tape width : 25 mm
 Carry bar width (black) : 615 mm
 Carry bar width (white) : 550 mm

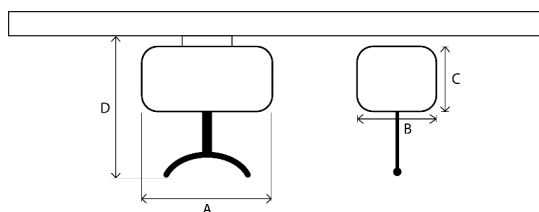

Standards

IEC 60601-1:2012 IEC 62366-1:2015
 IEC 60601-2:2014 ISO 10535:2006
 IEC 60601-1-11:2010 EN ISO 15223-1:2016



This product is CE marked and complies with EU MDR 2017/745

Features

Hand control : Wired electric handset
 Indicator : LED battery level and fault information
 Warranty : 1 year

Duty cycle : 15% use, 85% rest
 Battery : 2x12 V NiMH, 3.3 Ah
 Charging time : 8.5 hours
 Charging type : Through handset charging
 Lifts per charge : 100 lifts at 130 kg
 : 60 lifts at 200 kg

Emergency stop : Yes
 Emergency lowering : Electrical
 IP rating (hoist) : IP20
 IP rating (handset) : IP24
 Carry bar type (black) : QRS, 3 hook, looped
 Carry bar type (white) : QRS, 1 hook, looped
 Cover material : UL 94 V-0 flame retardant ABS

Contact

Unit 4 Jubilee Way
 Grange Moor
 Wakefield
 United Kingdom
 WF4 4TD
 +44 (0)1924 840100
 info@prismmedical.co.uk

